



# MODEL: 5LBS26032FB75FTB.V3\*

# BARRIER FREE

\*ALL ACCESSORIES OPTIONAL

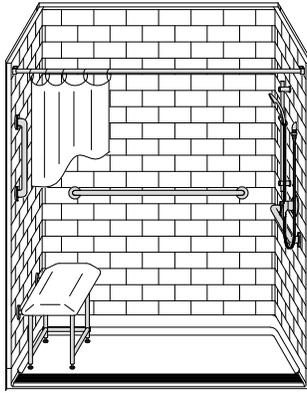

PERSPECTIVE VIEW - N.T.S.

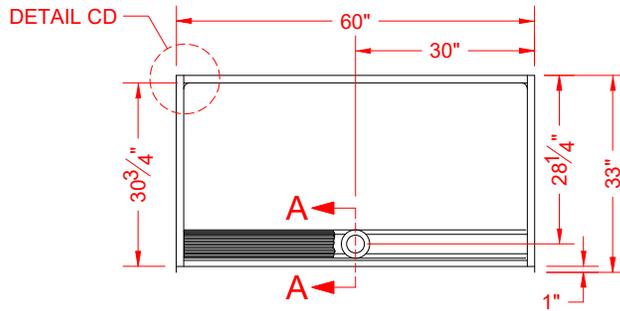


TOP VIEW - SCALE  $\frac{3}{8}$ " = 1'-0"




## Features:

- Molded, five-piece gelcoat/fiberglass shower module with trench drain and stainless steel grate
- "Subway Tile", 4" x 8" simulated tile wall finish, white (standard)
- Integral full wood backing for strength and unlimited accessory placement
- Available in various threshold heights
- On all threshold heights 1-1/4" or shorter, no mud set is required and an anchoring adhesive kit is supplied
- On all threshold heights 1-1/2" or taller, no mud set is required

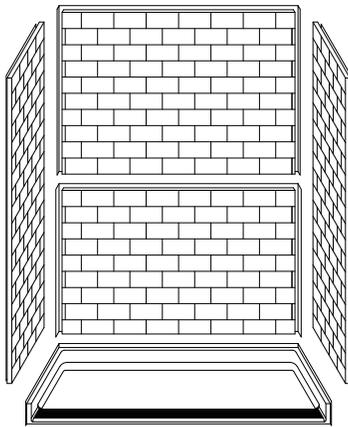

ASSEMBLY VIEW - N.T.S.

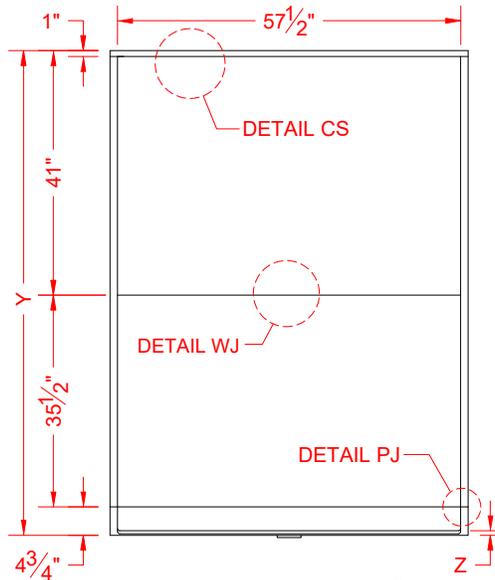

FRONT ELEVATION - SCALE:  $\frac{3}{8}$ " = 1'-0"

## \*OTHER THRESHOLD HEIGHTS AVAILABLE UPON REQUEST

MODEL #	UNIT THRESHOLD HEIGHT	
	Y	Z*
5LBS26032FB75FTB.V3	81-1/4"	3/4" MIN
5LBS26032FB2FTB.V3	82-1/2"	2" MAX

\* - SEE BACK FOR DETAIL SECTIONS

## PRODUCT SPECIFICATIONS:

- Multi piece shower module shall be constructed of gelcoat/fiberglass with full integral plywood backing
- Rough-In: Stud opening +1/4" -0" Nominal Dimensions.

C.S.I. FORMAT SPECIFICATION TEXT AVAILABLE

## PRODUCT INFORMATION:

- Accessories: Factory installed, unless prone to damage during installation/shipping. Polished chrome/satin stainless standard, others available.
- Colors: White as standard, others to match any major fixture manufacturer, also available with sprayable solid surface in many colors
- Custom curb heights, other than shown, are available (between min. and max.)

## OPTIONAL ACCESSORIES:

### INSTALLED BY OTHERS:

- Seat, folding
- Grab bar
- Soap dish
- Mixing valve, pressure-balancing, lever handle, pre-plumbed tree to supply elbow
- Curtain rod brackets
- Curtain and rod
- Trench grate and No-caulk brass drain (INCLUDED)

## CODES:

- Designed and manufactured in compliance with the following standards and codes:
- ANSI Z124.2 Standards for Plastic Showers
- ANSI A117.1 B - Accessible and Usable Buildings and Facilities
- UPC / IPC compliant when in accordance with Section 408.5 (UPC, 2021)


## NOTICE OF LIMITATION:

- Adhere to floor as required




We reserve the right to make revisions without notice in the design of fixtures or in packaging unless this right has specifically been waived at the time the order is accepted.

**5LBS26032FB75FTB.V3**

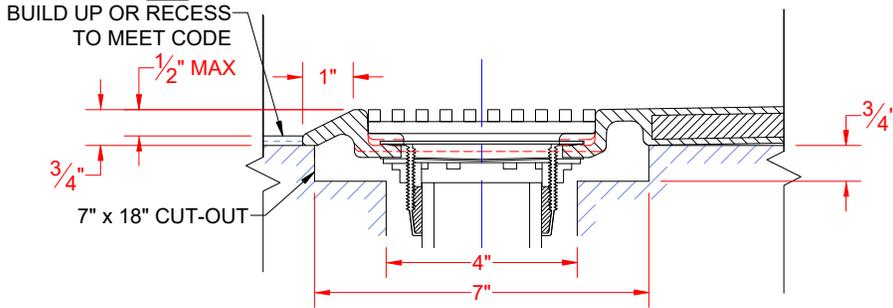


**SECTION A-A - SCALE: 3" = 1'-0"**

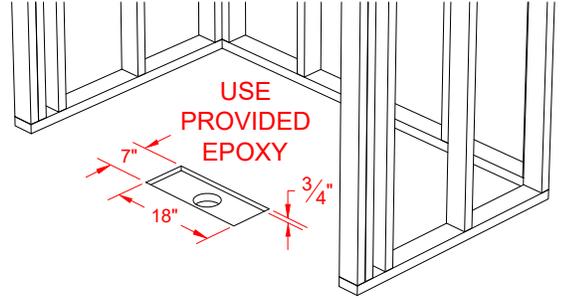

**FOR MODELS ENDING IN A75FT\*.V3, INSTALLATION REQUIRES A 7" x 18" x 3/4" CUT-OUT.**

**5LBS26032FB2FTB.V3**

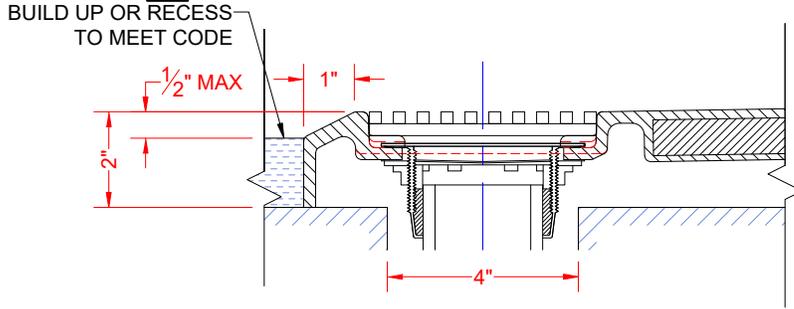


**SECTION A-A - SCALE: 3" = 1'-0"**




**FOR MODELS ENDING IN A15FT\*.V3, A17FT\*.V3, OR A2FT\*.V3, INSTALLATION REQUIRES A 4" DRAIN HOLE.**


**\*\*OTHER THRESHOLD HEIGHTS AVAILABLE UPON REQUEST\*\***

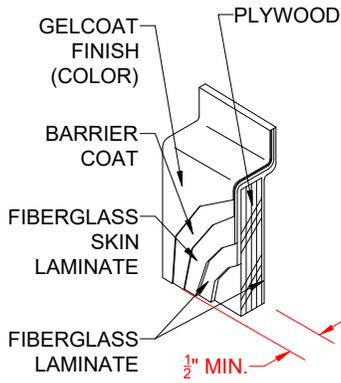


**DETAIL CS - SCALE: N.T.S. CROSS SECTION DETAIL**



**DETAIL CD - SCALE: 3" = 1'-0" CORNER DETAIL**



**DETAIL PJ - SCALE: 3" = 1'-0" PAN JOINT DETAIL**



**DETAIL WJ - SCALE: 3" = 1'-0" WALL JOINT DETAIL**